


### 鐵氟龍熱縮套管



**Penntube<sup>®</sup>**  
**SMT**

- 材質  
氟樹脂 FEP
- 連續使用溫度  
**200°C**
- 收縮溫度  
**120°C**

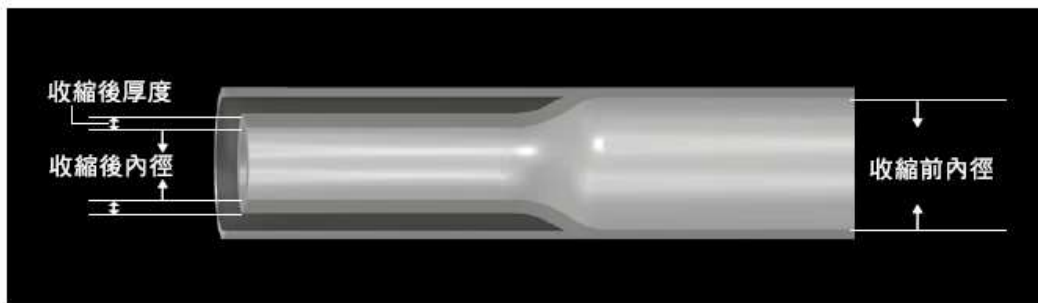

Penntube is a tube made of fluoropolymer with many superior properties. By covering the desired location of an object with a tube, many benefits could be gained such as: temperature resistance, dielectric properties, non-stick, low friction and protection from outside environment (chemical resistance, humidity resistance, contamination resistance). It also reinforces the covered area quite easily.

Penntube is used in a wide variety of markets such as: aircraft & aerospace, semiconductor equipment, electric power & communication, computer & OA (office automation), transportation, food & chemicals, home appliance, etc.

mm

尺寸	收縮前內徑(最小值)	收縮後內徑(最大值)	收縮後厚度(標準值)	* 標準包裝單位
AWG-24	0.81	0.68	0.20	30 m
AWG-22	1.10	0.83	0.20	30 m
AWG-20	1.27	1.00	0.20	30 m
AWG-18	1.60	1.25	0.20	30 m
AWG-16	2.10	1.55	0.23	30 m
AWG-14	2.40	1.80	0.23	30 m
AWG-12	2.90	2.30	0.23	30 m
AWG-10	3.50	2.90	0.25	25 pcs
AWG- 9	4.00	3.20	0.25	25 pcs
AWG- 8	4.60	3.60	0.25	25 pcs
AWG- 7	5.00	4.00	0.28	25 pcs
AWG- 6	5.70	4.60	0.28	25 pcs
AWG- 5	6.40	5.00	0.28	25 pcs
AWG- 4	7.40	5.80	0.28	25 pcs
AWG- 3	7.90	6.40	0.28	25 pcs
AWG- 2	9.20	7.20	0.30	25 pcs
AWG- 1	10.20	7.90	0.30	25 pcs
AWG- 0	11.20	8.90	0.30	25 pcs
#10	12.70	9.70	0.38	10 pcs
#12	14.70	11.40	0.50	10 pcs
#14	16.90	13.00	0.50	10 pcs
#16	17.70	13.70	0.50	10 pcs
#20	22.00	18.00	0.50	10 pcs
#25	27.90	22.30	0.50	10 pcs
#30	33.00	25.40	0.50	1 pcs
#38	43.20	33.40	0.50	1 pcs
#48	53.30	43.20	0.50	1 pcs
5/8	21.10	16.10	0.64	5 pcs
3/4	25.40	19.40	0.80	5 pcs
7/8	29.70	22.70	0.90	1 pcs