




材質	JIS 記號	1種A	1種B	3種	4種C	4種D
	CNL 記號	NB709B	NB901B	EP702B	SE701G	VT730B

單位 unit: mm

	○環 P規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
*	P 2	1.8	5.6	1.9	01002
	P 3	2.8	6.6	1.9	01003
	P 4	3.8	7.6	1.9	01004
	P 5	4.8	8.6	1.9	01005
	P 6	5.8	9.6	1.9	01006
	P 7	6.8	10.6	1.9	01007
	P 8	7.8	11.6	1.9	01008
	P 9	8.8	12.6	1.9	01009
	P 10	9.8	13.6	1.9	01010
	P 10A	9.8	14.6	2.4	01010A
	P 11	10.8	15.6	2.4	01011
	P 11.2	11	15.8	2.4	01011.2
	P 12	11.8	16.6	2.4	01012
	P 12.5	12.3	17.1	2.4	01012.5
	P 14	13.8	18.6	2.4	01014
	P 15	14.8	19.6	2.4	01015
	P 16	15.8	20.6	2.4	01016
*	P 17	16.8	21.6	2.4	01017
	P 18	17.8	22.6	2.4	01018
*	P 19	18.8	23.6	2.4	01019
	P 20	19.8	24.6	2.4	01020
	P 21	20.8	25.6	2.4	01021
	P 22	21.8	26.6	2.4	01022
	P 22A	21.7	28.7	3.5	01022A
	P 22.4	22.1	29.1	3.5	01022.4
	P 24	23.7	30.7	3.5	01024
	P 25	24.7	31.7	3.5	01025
	P 25.5	25.2	32.2	3.5	01025.5
	P 26	25.7	32.7	3.5	01026
	P 28	27.7	34.7	3.5	01028
	P 29	28.7	35.7	3.5	01029
	P 29.5	29.2	36.2	3.5	01029.5
	P 30	29.7	36.7	3.5	01030
	P 31	30.7	37.7	3.5	01031
	P 31.5	31.2	38.2	3.5	01031.5
	P 32	31.7	38.7	3.5	01032
	P 34	33.7	40.7	3.5	01034
	P 35	34.7	41.7	3.5	01035
	P 35.5	35.2	42.2	3.5	01035.5
	P 36	35.7	42.7	3.5	01036

	○環 P規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
	P 38	37.7	44.7	3.5	01038
	P 39	38.7	45.7	3.5	01039
	P 40	39.7	46.7	3.5	01040
	P 41	40.7	47.7	3.5	01041
	P 42	41.7	48.7	3.5	01042
	P 44	43.7	50.7	3.5	01044
	P 45	44.7	51.7	3.5	01045
	P 46	45.7	52.7	3.5	01046
*	P 47A	47	58.4	5.7	01047A
	P 48	47.7	54.7	3.5	01048
	P 48A	47.6	59	5.7	01048A
	P 49	48.7	55.7	3.5	01049
	P 50	49.7	56.7	3.5	01050
	P 50A	49.6	61	5.7	01050A
	P 52	51.6	63	5.7	01052
	P 53	52.6	64	5.7	01053
	P 55	54.6	66	5.7	01055
	P 56	55.6	67	5.7	01056
	P 58	57.6	69	5.7	01058
	P 60	59.6	71	5.7	01060
	P 62	61.6	73	5.7	01062
	P 63	62.6	74	5.7	01063
	P 65	64.6	76	5.7	01065
	P 67	66.6	78	5.7	01067
	P 70	69.6	81	5.7	01070
	P 71	70.6	82	5.7	01071
	P 75	74.6	86	5.7	01075
	P 80	79.6	91	5.7	01080
	P 85	84.6	96	5.7	01085
	P 90	89.6	101	5.7	01090
	P 95	94.6	106	5.7	01095
	P 100	99.6	111	5.7	01100
	P 102	101.6	113	5.7	01102
	P 105	104.6	116	5.7	01105
	P 110	109.6	121	5.7	01110
	P 112	111.6	123	5.7	01112
	P 115	114.6	126	5.7	01115
	P 120	119.6	131	5.7	01120
	P 125	124.6	136	5.7	01125
	P 130	129.6	141	5.7	01130

* 代表國際規範外， 加耐力公司特別尺寸。

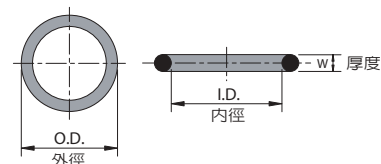

材質	JIS 記號	1種A	1種B	3種	4種C	4種D
	CNL 記號	NB709B	NB901B	EP702B	SE701G	VT730B

單位 unit: mm

	○環 P規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
	P 132	131.6	143	5.7	01132
	P 135	134.6	146	5.7	01135
	P 140	139.6	151	5.7	01140
	P 145	144.6	156	5.7	01145
	P 150	149.6	161	5.7	01150
	P 150A	149.5	166.3	8.4	01150A
	P 155	154.5	171.3	8.4	01155
	P 160	159.5	176.3	8.4	01160
	P 165	164.5	181.3	8.4	01165
	P 170	169.5	186.3	8.4	01170
	P 175	174.5	191.3	8.4	01175
	P 180	179.5	196.3	8.4	01180
	P 185	184.5	201.3	8.4	01185
	P 190	189.5	206.3	8.4	01190
	P 195	194.5	211.3	8.4	01195
	P 200	199.5	216.3	8.4	01200
	P 205	204.5	221.3	8.4	01205
	P 209	208.5	225.3	8.4	01209
	P 210	209.5	226.3	8.4	01210
	P 215	214.5	231.3	8.4	01215
	P 220	219.5	236.3	8.4	01220
	P 225	224.5	241.3	8.4	01225
	P 230	229.5	246.3	8.4	01230
	P 235	234.5	251.3	8.4	01235
	P 240	239.5	256.3	8.4	01240
	P 245	244.5	261.3	8.4	01245
	P 250	249.5	266.3	8.4	01250
	P 255	254.5	271.3	8.4	01255
	P 260	259.5	276.3	8.4	01260
	P 265	264.5	281.3	8.4	01265
	P 270	269.5	286.3	8.4	01270
	P 275	274.5	291.3	8.4	01275
	P 280	279.5	296.3	8.4	01280
	P 285	284.5	301.3	8.4	01285
	P 290	289.5	306.3	8.4	01290
	P 295	294.5	311.3	8.4	01295
	P 300	299.5	316.3	8.4	01300
*	P 305	304.5	321.3	8.4	01305
*	P 310	309.5	326.3	8.4	01310
	P 315	314.5	331.3	8.4	01315

	○環 P規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
	P 320	319.5	336.3	8.4	01320
*	P 325	324.5	341.3	8.4	01325
*	P 330	329.5	346.3	8.4	01330
	P 335	334.5	351.3	8.4	01335
	P 340	339.5	356.3	8.4	01340
*	P 345	344.5	361.3	8.4	01345
*	P 350	349.5	366.3	8.4	01350
	P 355	354.5	371.3	8.4	01355
	P 360	359.5	376.3	8.4	01360
*	P 365	364.5	381.3	8.4	01365
*	P 370	369.5	386.3	8.4	01370
	P 375	374.5	391.3	8.4	01375
*	P 380	379.5	396.3	8.4	01380
	P 385	384.5	401.3	8.4	01385
*	P 390	389.5	406.3	8.4	01390
*	P 395	394.5	411.3	8.4	01395
	P 400	399.5	416.3	8.4	01400
*	P 405	404.5	421.3	8.4	01405
*	P 410	409.5	426.3	8.4	01410
*	P 415	414.5	431.3	8.4	01415
*	P 420	419.5	436.3	8.4	01420
*	P 425	424.5	441.3	8.4	01425
*	P 430	429.5	446.3	8.4	01430
*	P 435	434.5	451.3	8.4	01435
*	P 440	439.5	456.3	8.4	01440
*	P 445	444.5	461.3	8.4	01445
*	P 450	449.5	466.3	8.4	01450
*	P 455	454.5	471.3	8.4	01455
*	P 460	459.5	476.3	8.4	01460
*	P 465	464.5	481.3	8.4	01465
*	P 470	469.5	486.3	8.4	01470
*	P 475	474.5	491.3	8.4	01475
*	P 480	479.5	496.3	8.4	01480
*	P 485	484.5	501.3	8.4	01485
*	P 490	489.5	506.3	8.4	01490
*	P 495	494.5	511.3	8.4	01495
*	P 500	499.5	516.3	8.4	01500
*	P 505	504.5	521.3	8.4	01505
*	P 510	509.5	526.3	8.4	01510
*	P 515	514.5	531.3	8.4	01515



材質	JIS 記號	1種A	1種B	3種	4種C	4種D
	CNL 記號	NB709B	NB901B	EP702B	SE701G	VT730B

單位 unit: mm

	○環 P規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
*	P 520	519.5	536.3	8.4	01520
*	P 525	524.5	541.3	8.4	01525
*	P 530	529.5	546.3	8.4	01530
*	P 535	534.5	551.3	8.4	01535
*	P 540	539.5	556.3	8.4	01540
*	P 545	544.5	561.3	8.4	01545
*	P 550	549.5	566.3	8.4	01550
*	P 555	554.5	571.3	8.4	01555
*	P 560	559.5	576.3	8.4	01560
*	P 565	564.5	581.3	8.4	01565
*	P 570	569.5	586.3	8.4	01570
*	P 575	574.5	591.3	8.4	01575
*	P 580	579.5	596.3	8.4	01580
*	P 585	584.5	601.3	8.4	01585
*	P 590	589.5	606.3	8.4	01590
*	P 595	594.5	611.3	8.4	01595
*	P 600	599.5	616.3	8.4	01600

* 代表國際規範外， 加耐力公司特別尺寸。

	○環 G規格	內徑 I.D.	外徑 O.D.	厚度 W	加耐力編號 CNL Parts No.
	G 25	24.4	30.6	3.1	02025
	G 30	29.4	35.6	3.1	02030
	G 35	34.4	40.6	3.1	02035
	G 40	39.4	45.6	3.1	02040
*	G 42	41.4	47.6	3.1	02042
	G 45	44.4	50.6	3.1	02045
	G 50	49.4	55.6	3.1	02050
*	G 52	51.4	57.6	3.1	02052
	G 55	54.4	60.6	3.1	02055
*	G 58	57.4	63.6	3.1	02058
	G 60	59.4	65.6	3.1	02060
*	G 62	61.4	67.6	3.1	02062
*	G 63	62.4	68.6	3.1	02063
*	G 64	63.4	69.6	3.1	02064
	G 65	64.4	70.6	3.1	02065
*	G 67	66.4	72.6	3.1	02067
*	G 68	67.4	73.6	3.1	02068
	G 70	69.4	75.6	3.1	02070
*	G 72	71.4	77.6	3.1	02072
	G 75	74.4	80.6	3.1	02075
	G 80	79.4	85.6	3.1	02080
	G 85	84.4	90.6	3.1	02085
	G 90	89.4	95.6	3.1	02090
	G 95	94.4	100.6	3.1	02095
	G 100	99.4	105.6	3.1	02100
	G 105	104.4	110.6	3.1	02105
	G 110	109.4	115.6	3.1	02110
	G 115	114.4	120.6	3.1	02115
	G 120	119.4	125.6	3.1	02120
	G 125	124.4	130.6	3.1	02125
	G 130	129.4	135.6	3.1	02130
	G 135	134.4	140.6	3.1	02135
	G 140	139.4	145.6	3.1	02140
	G 145	144.4	150.6	3.1	02145
*	Gs150	149.3	155.5	3.1	029150
*	Gs155	154.3	160.5	3.1	029155
*	Gs160	159.3	165.5	3.1	029160
*	Gs165	164.3	170.5	3.1	029165
*	Gs170	169.3	175.5	3.1	029170
*	Gs175	174.3	180.5	3.1	029175

○環